



DESIGN FEATURE:


1. Tongue groove joint valve seat design, not easy to deform, zero leakage
2. Double flat precision bite structure, prevent corrosion, easy to disassemble and assemble
3. The valve meets ISO5211 standard high platform design, ultra long service life
4. Bidirectional sealing, bidirectional pressure bearing, small opening & closing torque, good liquidity
5. Compact structure, convenient installation, economical & practical, widely used

SPECIFICATIONS:


Model	EMEB-OCF
Nominal inner diameter	DN50~DN500
Pressure	1.0~1.6Mpa
Temperature	-10°C~110°C
Voltage	24VDC, 220VAC
Body material	Cast iron
Seal material	EPDM
Disc material	Stainless steel
Actuator style	On/Off
Connection	Flanged type

CIRCUIT DIAGRAM:


1. AC 220V - Standard on-off

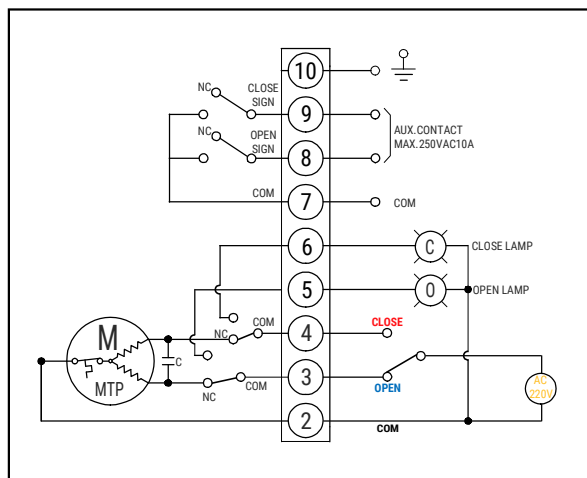

2. DC 24V - Standard on-off

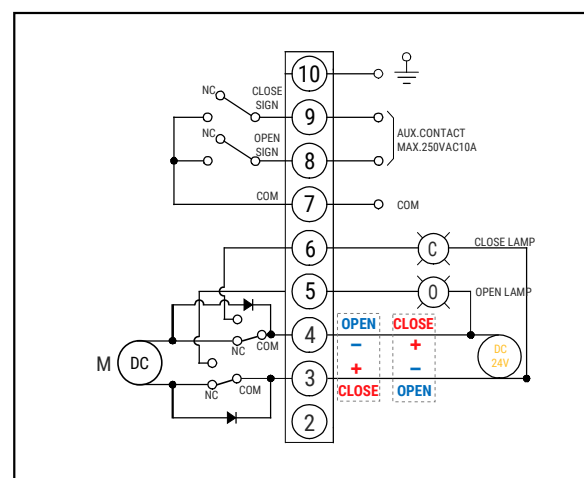

DESIGN FEATURE:

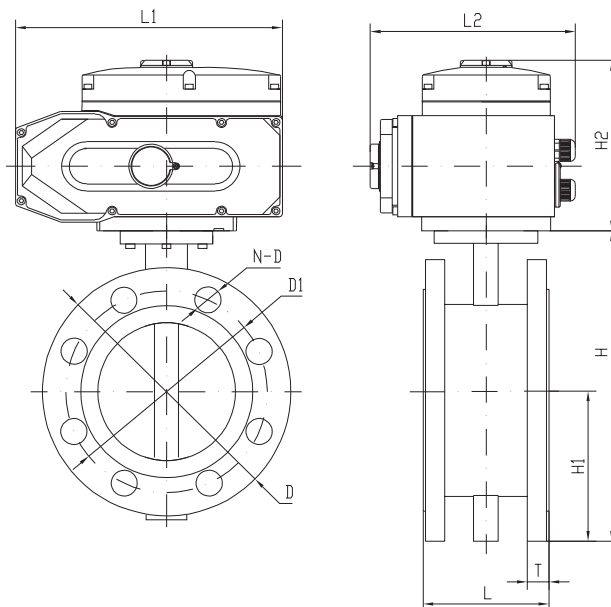

DEMENSIONS:

DN	Overall Dimension						Connection Size 1.0/1.6		
	L	H	H1	L1	L2	H2	D	D1	N-D
50	108	200	80	165/320	150/220	135/270	165	125	4-18
65	112	219	89	165/320	150/220	135/270	185	145	4-18
80	114	240	95	165/320	150/220	135/270	200	160	8-18
100	127	270	114	190/320	170/220	140/270	220	180	8-18
125	140	295	125	190/355	170/250	140/275	250	210	8-18
150	140	330	142	190/375	170/290	140/315	285	240	8-22
200	152	375	170	270/375	220/290	170/315	340	295	8-22/12-22
250	165	433	198	270/375	220/290	170/315	395/405	350	12-22/12-26
300	178	503	223	270/400	220/330	170/360	445/460	400/410	12-22/12-26
350	190	590	260	270/400	220/330	170/360	505/520	460/470	16-22/16-26
400	216	660	290	400	330	520	565/580	515/525	16-26/16-30
450	222	720	320	400	330	520	615/640	565/585	20-16/20-30
500	229	900	400	400	330	520	670/715	620/650	20-26/20-33
600	267	1027	457	-	-	-	780/840	725/770	20-30/20-36