



DESIGN FEATURE:


1. Strong corrosion resistance, not easy to aging, light weight, UV resistant.
2. Smooth pipe wall, low friction, smooth flow, clean and sanitary.
3. Small torque, quick response, stable working, ultra-long service life.
4. All-plastic structure, convenient disassembly and assembly, economical & practical, zero leakage.

SPECIFICATIONS:


Model	EMEBA-OST
Nominal inner diameter	DN50~DN25
Pressure	1.0~1.6Mpa
Temperature	-10°C~80°C
Voltage	24VDC, 220VAC
Body material	UPVC, PVC
Seal material	PTFE
Ball	UPVC, PVC
Actuator style	On/Off
Connection	True Union

CIRCUIT DIAGRAM:


1. AC 220V - Standard on-off

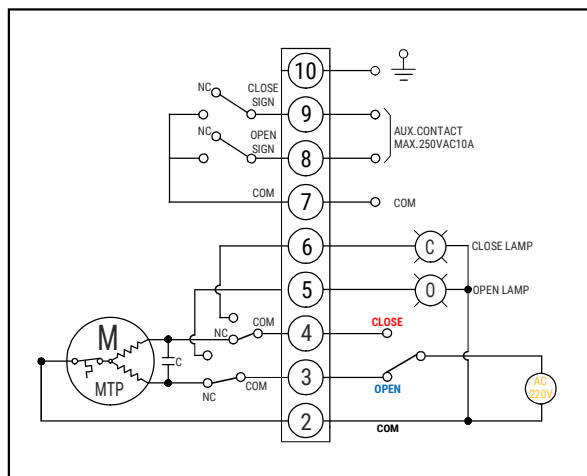

2. DC 24V - Standard on-off

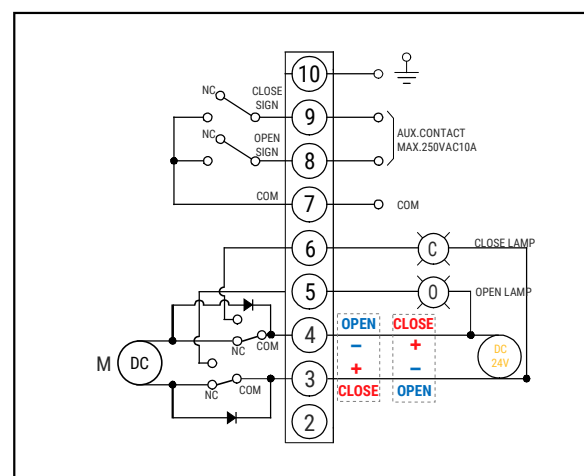

DESIGN FEATURE:

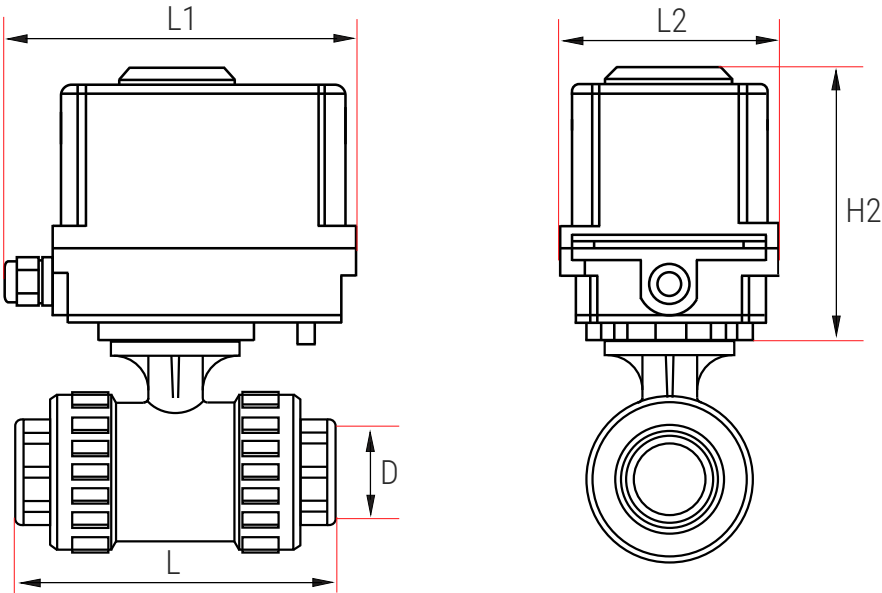

DEMENSIONS:

DN	D	L	L1	L2	H2
15	20	112	157	90	133
20	25	130	157	90	133
25	32	144	157	90	133