



DESIGN FEATURE:


1. Strong corrosion resistance, not easy to aging, light weight, UV resistant.
2. Smooth pipe wall, low friction, smooth flow, clean and sanitary.
3. Small torque, fast response, stable working, ultra long service life.
4. All plastic structure, convenient disassembly and assembly, economical and practical, zero leakage.

SPECIFICATIONS:


Model	EMEB-OPW
Nominal inner diameter	DN50~DN500
Pressure	1.0~1.6Mpa
Temperature	20℃~80℃
Voltage	24VDC, 220VAC
Body material	UPVC, PP, PVC
Seal material	NBR,EPDM
Disc material	UPVC, PP, PVC
Actuator style	On/Off
Connection	Wafer type

CIRCUIT DIAGRAM:


1. AC 220V - Standard on-off

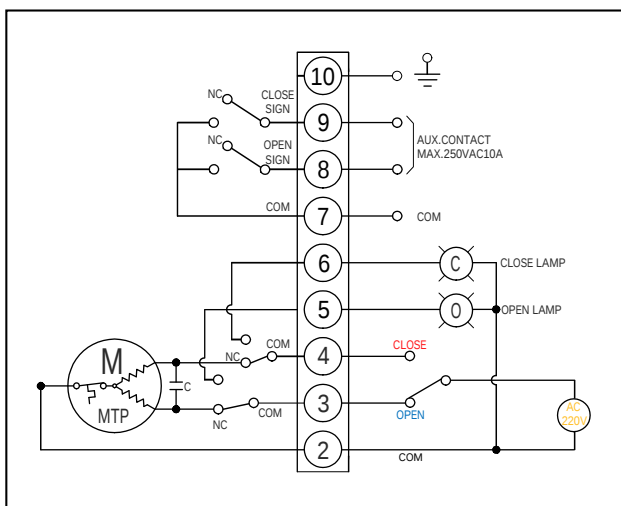

2. DC 24V - Standard on-off

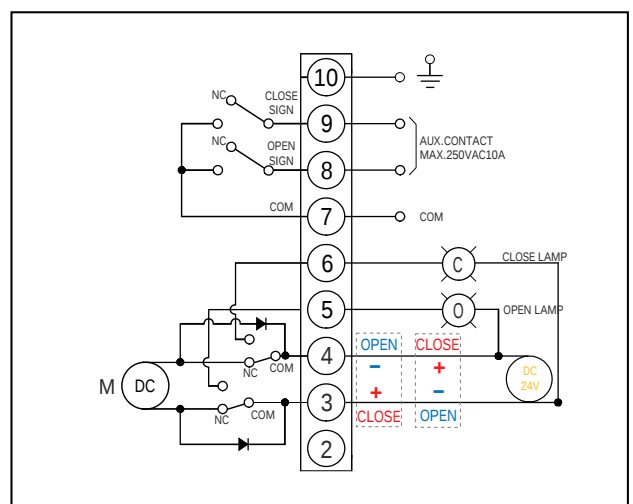

DESIGN FEATURE:

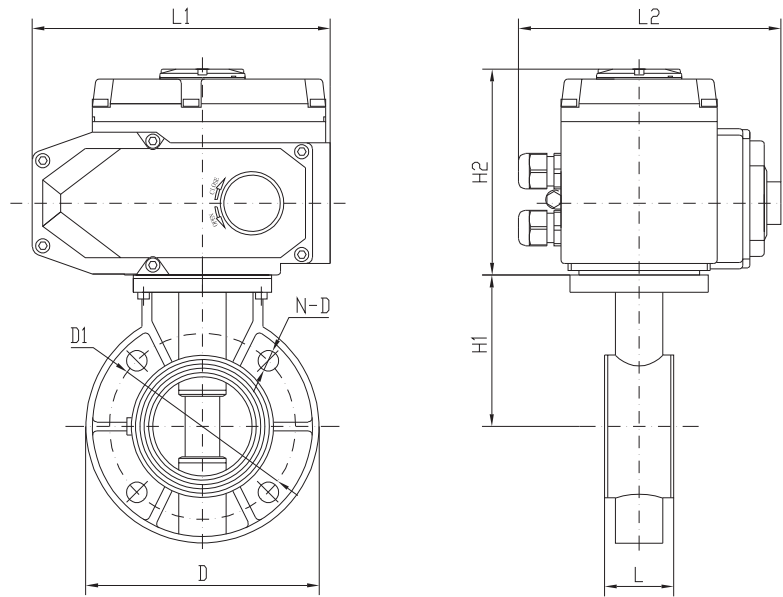

DIMENSIONS:

DN	Overall Dimension				Connection Dimension		
	L	L1	L2	H2	D	D1	N-D
40	39	165/320	150/220	135/270	145	110	4-18
50	45	165/320	150/220	135/270	160	125	4-18
65	48	165/320	150/220	135/270	180	145	4-18
80	48	165/320	150/220	135/270	195	160	8-18
100	58	165/320	150/220	135/270	215	180	8-18
125	70	190/320	170/220	140/270	245	210	8-18
150	76	190/355	170/250	140/275	280	240	8-22
200	92	270/375	220/290	170/315	335	295	8-22
250	114	270/375	220/290	170/315	395	350	12-22
300	120	270/400	220/330	170/360	445	400	12-22
350	130	270/400	220/330	170/360	505	460	16-22
400	140	270/400	220/330	170/360	580	515	16-22
450	152	400	330	250	615	565	20-26
500	152	400	330	250	670	620	20-26
600	178	400	330	250	780	725	20-30