



DESIGN FEATURE:


1. Tongue and groove joint valve seat design, hard deformation.
2. Double flat precision bite structure, anti corrosion, easily remove & install.
3. Comply with ISO5211 standard high platform design, Ultra long durability.
4. Bi direction sealing & pressure bearing, Small switched torque, Good Liquidity.
5. Compact structure, Convenient installation, Economical & practical, widely application.

SPECIFICATIONS:


Model	EMEB-OSW
Nominal inner diameter	DN50~DN500
Pressure	1.0~1.6Mpa
Temperature	-10°C~180°C
Voltage	24VDC, 220VAC
Body material	Stainless steel
Seal material	PTFE
Disc material	Stainless steel
Actuator style	On/Off
Connection	Wafer type

CIRCUIT DIAGRAM:


1. AC 220V - Standard on-off

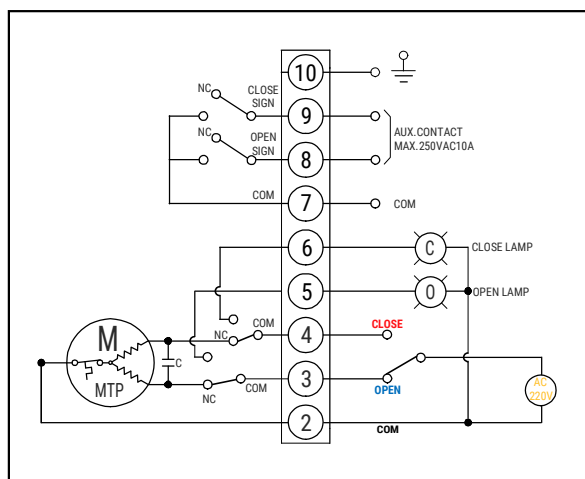

2. DC 24V - Standard on-off

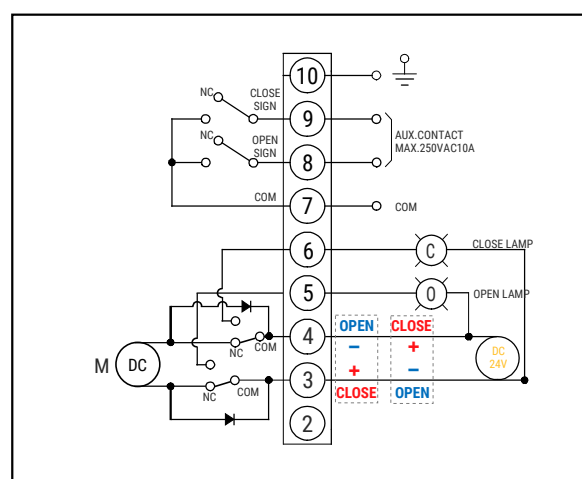

DESIGN FEATURE:

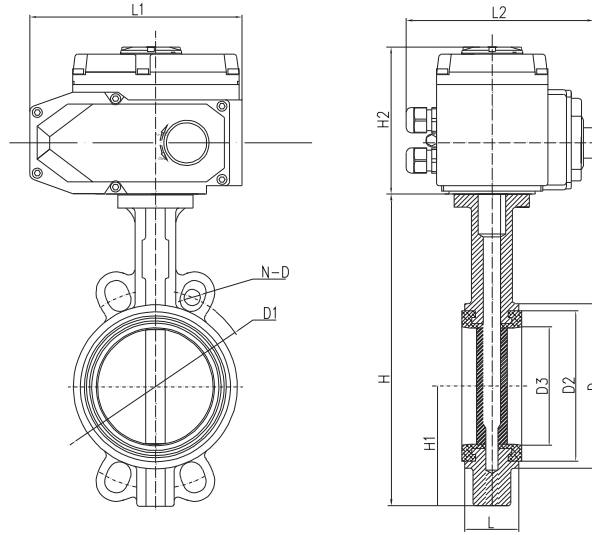

DEMENSIONS:

DN	Overall Dimension						Connection Size 1.0/1.6			
	L	H	H1	L1	L2	H2	D	D1	D2	N-D
40	33	147	53	165/320	150/220	135/270	80	110	68	4-16
50	42	195	55	165/320	150/220	135/270	95	125	82	4-16
65	44	217	64	165/320	150/220	135/270	114	145	97	4-16
80	44	232	73	165/320	150/220	135/270	126	160	113	8-16
100	50	270	88	190/320	170/220	140/270	154	180	139	8-16
125	56	292	102	190/355	170/250	140/275	180	210	163	8-16
150	56	318	115	190/375	170/290	140/315	206	240	195	8-20
200	60	390	149	270/375	220/290	170/315	264	295	250	8-20/12-20
250	68	457	184	270/375	220/290	170/315	320	350/355	305	12-20/12-24
300	78	518	207	270/400	220/330	170/360	370	400/410	352	12-20/12-24
350	78	610	247	270/400	220/330	170/360	430	460/470	405	16-20/16-24
400	102	650	275	400	330	520	480	515/525	455	16-24/16-27
450	114	713	307	400	330	520	550	565/585	515	20-24/20-27
500	127	768	330	400	330	520	590	620/650	565	20-24/20-30
600	151	919	400	-	-	-	695	725/770	674	20-27/20-33